

IDENTIFIANT DE CONNEXION SIMPLIFIE

PRÉSENTATION

Afin de permettre aux utilisateurs de saisir simplement leur nom d'utilisateur, sans la partie domaine, lors de la connexion à BlueMind (par exemple "j.dupont" au lieu de "j.dupont@bluemind.loc") il suffit de configurer un domaine par défaut.



Autres domaines

Lorsque cette configuration est en place, il est toujours possible de se connecter sur un autre domaine. Il faut alors indiquer le domaine complet (exemple : marc@bm.org).

MISE EN ŒUVRE

- éditer le fichier /etc/bm/bm.ini et rajouter à la fin la ligne suivante :


```
| default-domain=bluemind.loc
```

NB : remplacer bluemind.loc par le nom du domaine concerné

- redémarrer le service bm-hps :

```
| service bm-hps restart
```

La page d'identification se présente alors ainsi :

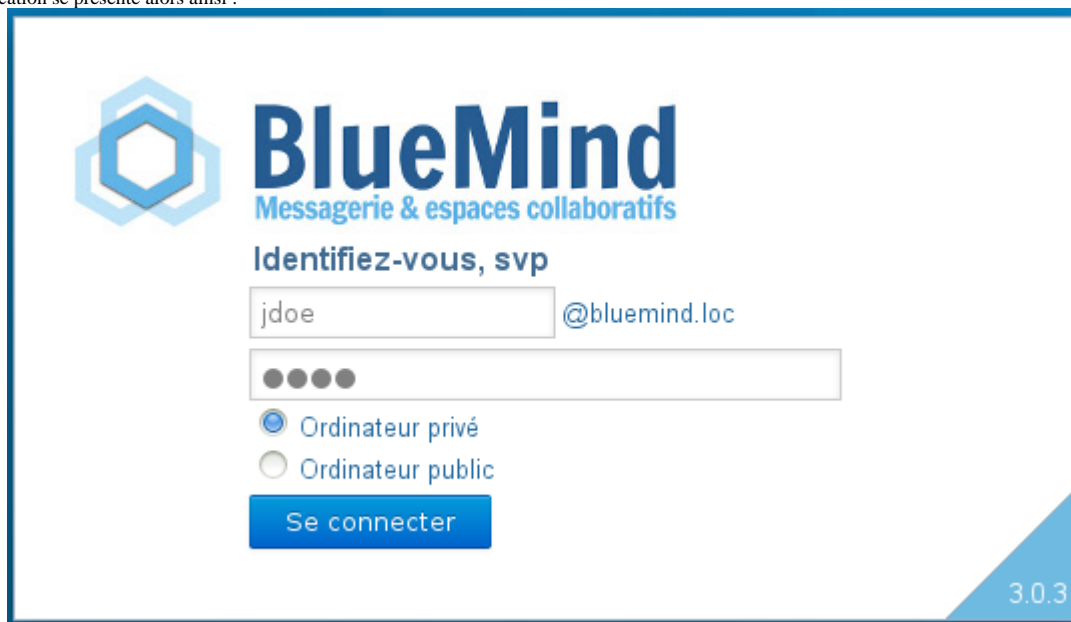

The image shows a login interface for BlueMind. It features the BlueMind logo (a blue hexagon) and the text "BlueMind" in large blue letters, followed by "Messagerie & espaces collaboratifs" in smaller blue text. Below this, it says "Identifiez-vous, svp". There are two input fields: one for the username "jdoe" and another for the domain "@bluemind.loc". Below these fields is a password field with four dots. There are two radio buttons: "Ordinateur privé" (selected) and "Ordinateur public". At the bottom is a blue button labeled "Se connecter". In the bottom right corner, the version number "3.0.3" is displayed.